

SPECIAL RIPCORD

SPECIAL TWO CORE FLAT FLEXIBLE CABLE

Construction


High conductivity bunched plain annealed flexible copper conductors, insulated in a parallel configuration with a flexible grade PVC and a Blue, Black or White tracer for polarity indication.

Applications

For battery chargers, loudspeakers, car radios and many other applications.

Packaging

Available in 100 metre reels.

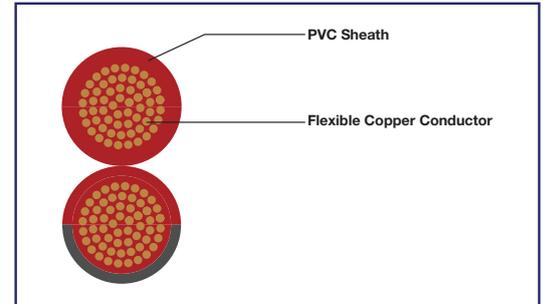

Specification	(In House)
Voltage Rating	300 Volts
Test Voltage	2000 Volts
Temperature Range	-10° to +80°C
Flexibility Class	5
Conductor Type	High conductivity annealed copper
Insulation Material	General purpose flexible grade PVC
Colour Options	Red/Black Transparent/Blue Transparent Blue/White White/Black White



Technical Data

Product Code	Size mm ²	Stranding No x Dia	Nominal Breadth & Height	Mass kg/100m
SR0.5X2#	0.5	14 x 0.21	2.6 x 5.5	2.26
SR1.0X2#	1.0	28 x 0.21	3.5 x 7.3	3.15
SR1.5X2#	1.5	28 x 0.26	3.3 x 6.8	4.50
SR2.5X2#	2.5	44 x 0.26	3.8 x 7.9	6.64
SR3.0X2#	3.0	87 x 0.21	5.8 x 12.0	11.11
SR4.0X2#	4.0	70 x 0.26	4.5 x 9.4	10.14
SR6.0X2#	6.0	72 x 0.31	5.1 x 10.5	14.54

When ordering, insert colour code here (Refer to Page 1)

* Not to be used for power supply.